



Schedule date		Att. Report		Att. Report	
Week	Date	First time zone	Second time zone	Week	Date
01	MON	02:20	11:30	13:01	18:00
02	TUE	09:00	11:30	13:35	18:00
03	WED	02:20	11:30	13:01	18:00
04	THU	09:00	11:30	13:35	18:00
05	FRI	02:20	11:30	13:01	18:00
06	SAT				
07	SUN				
08	MON	02:20	11:30	13:01	18:00
09	TUE	09:00	11:30	13:35	18:00
10	WED	02:20	11:30	13:01	18:00
11	THU	09:00	11:30	13:35	18:00
12	FRI	02:20	11:30	13:01	18:00
13	SAT				
14	SUN				
15	MON	02:20	11:30	13:01	18:00
16	TUE	09:00	11:30	13:35	18:00
17	WED	02:20	11:30	13:01	18:00
18	THU	09:00	11:30	13:35	18:00
19	FRI	02:20	11:30	13:01	18:00
20	SAT				
21	SUN				



You can use Excel; you can be an excellent Workforce Management Manager!

H8 SSR Fingerprint Time Clock

Introduction

H8, with SSR report (Self-Service-Recorder) stored in the time clock, it is the best choice for small chain stores. You can redact the employees' information and arrange shifts simply and easily in Excel format. Via USB disk or SD card, complex wire connection and IP setting can be avoided. It has been designed with ergonomics structure, extremely thin and slim. 3 inches TFT can display more information vividly, including fingerprint image quality and verification result etc.






Features:

- * Color TFT screen with GUI Interface for ease of use
- * Built-in latest Fingerprint algorithm V10.0
- * Built-in SSR attendance recorder
- * Support Office Excel Software, Openoffice.org, LibreOffice
- * Multi Languages
- * Built-in USB port and SD socket allow manual SSR recorder transfer
- * Function Keys to select the IN or OUT status of the punches
- * Real-time 1-touch data backup
- * Special designed structure for erecting or being appended

Configuration:

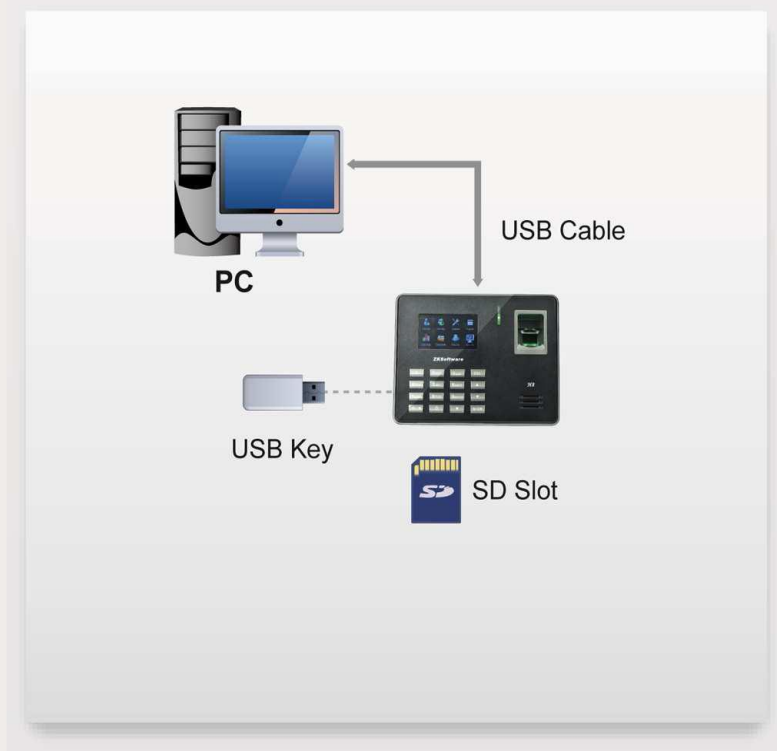

Specifications:

Display	3 inches TFT Screen
Fingerprint Capacity	500
Transaction Capacity	50,000
Communication	SD Card,USB-Host, USB-Client
Standard Functions	Scheduled-bell, SMS, Work code, DLST, SSR recorder, Self-Service Query, Automatic Status Switch ,9 Digit User ID,T9 Input
Optional Functions	Web-Server, ADMS
Power Supply	5V DC 2A
Operating Temperature	0 °C - 45 °C
Operating Humidity	20% - 80%
Dimension(W×H×D)	185X140X30 mm



www.ccss.co.th

